

PANEL5000-A152

Precision resistive touch screen, COM / USB optional, VGA / DVI signal input

Industrial Touch Monitor



Introduction

PANEL5000-A152 is ultra-thin industrial touch monitor that supports VGA and DVI inputs, front panel made of magnesium alloy with a PET film, support 12V DC power input, optional DC24V power input, power interface uses Fastening Type Phoenix terminal, to prevent accidental removal during use; touch screen with high temperature five-wire resistive, with high sensitivity, dust and waterproof, anti-oil, with gloves may merit normal operation, touch screen flexibility to choose the COM port, USB port to communicate with the host.

PANEL5000-A152 front panel compliant NEMA / IP65 waterproof and dustproof standard, to prevent installation in the control cabinet because of the scene splashing water droplets and water vapor into the host and thus affect equipment operation; high-strength steel box structure, so that it can adapt to the harsh industrial site work environment, the most suitable for factory automation, machinery manufacturing, CNC equipment, textile equipment, communication networks, power automation and other industrial applications.

Features and Benefits



Using precision resistive touch screen



Rugged steel structure



Phoenix terminal using fastening type power connector




Supports VESA wall mount



OSD control buttons on the rear panel

Specifications

Institutional		LCD	
Front Panel	Magnesium alloy front panel IP65 degree of protection, steel-type box structure	Size / Type	15-inch TFT LCD
Mounting	Embedded panel and VESA wall mounting	Resolution	1024×768
Buttons	The back of the machine is equipped with switches, lights, and OSD control buttons	Maximum color	16.7M
Signal Input	DVI and VGA	Display area	304.1×228.1mm
Communication	COM/USB	Reaction time	30ms
Power Input	12V DC voltage input, optional transfer 12VDC to 220VAC power adapter, optional 24V power input	Backlit	LED
Front Color	Silver (plus PET film)	Backlit MTBF	30,000 hours
Overall size	395×313×54mm(W×H×D)	Lattice	0.297×0.297
Case Size	373×297×48mm(W×H×D)	Brightness	450cd/m²
Hole Size	376×300 mm(W×H)	Contrast ratio	800 1
Weight	3.5kg	Max view angle	(H)150/(V)140
Environmental		Touch screen	
Working tem.	-20~+60℃ Electronic disk	Size / Type	15-inch five-wire analog resistive
Storage tem.	-30~+70℃	Resolution	4096×4096
Relative humidity	10~95%@40℃ No condensation	Response time	<5ms
Vibration	50~500Hz,1.5G,0.15mm Peak to peak	Surface hardness	3H
Shock	10G/peak 11ms sec	Click life	250g efforts, 35 million times
		Stroke life	250g efforts, 5 million times
		Transmittance	More than 81%

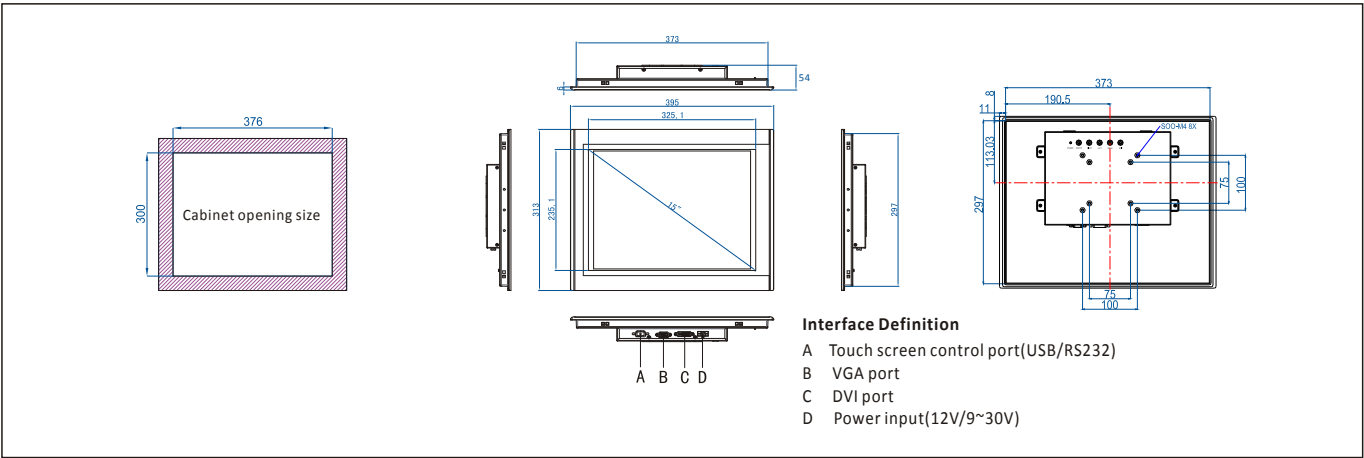

Ordering Information

PANEL5000-A152-TS	15-inch TFT LCD/Resolution 1024×768/VGA/DVI/Resistive Touch Screen/COM/DC 12V/adapter
PANEL5000-A152-TU	15-inch TFT LCD/Resolution 1024×768/VGA/DVI/Resistive Touch Screen/USB/DC 12V/adapter
PANEL5000-A152-C	15-inch TFT LCD/Resolution 1024×768/VGA/DVI/Glass/DC 12V/adapter
PANEL5000-A152-TSW	15-inch TFT LCD/Resolution 1024×768/VGA/DVI/Resistive Touch Screen/COM/DC24V
PANEL5000-A152-TUW	15-inch TFT LCD/Resolution 1024×768/VGA/DVI/Resistive Touch Screen/USB/DC24V
PANEL5000-A152-CW	15-inch TFT LCD/Resolution 1024×768/VGA/DVI/Glass/DC24V