


# ROBO-877VG2A

Intel® Core™ 2 Duo processor based PICMG SBC with DDR2 SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB

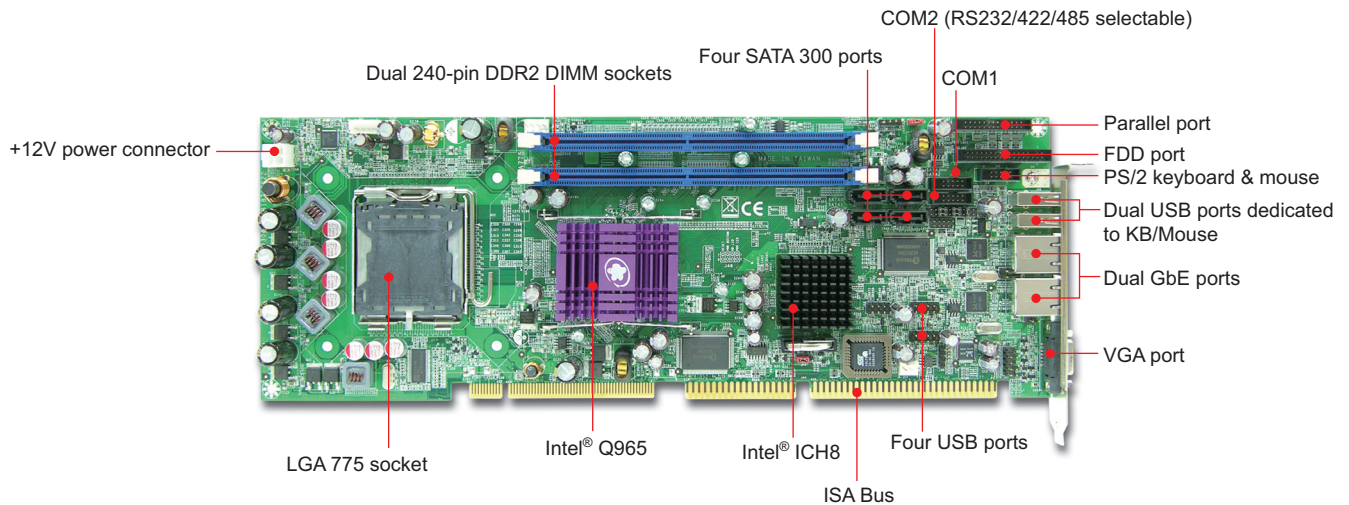

## FEATURES

- Support Intel® Core™ 2 Duo processor that only generates up to 65W TDP. Lower TDP than socket 478 Pentium® 4 processor makes the vertical mount slot board more reliability
- Low profile processor cooler improve stability and reliability of whole system
- More features such as EM64T, EIST, XD & VT can be easily applied to system by changing processor
- Integrated Intel® GMA X3000 graphics engine that built with high grade display capability
- Lockable cable latched notches of SATA connector that secure connection in vibration condition
- Support ISA expansion

## ORDERING GUIDE

<b>Standard</b>	<b>ROBO-877VG2A</b> LGA-775 Core 2 Duo processor based PICMG 1.0 SBC with DDR2 SDRAM, VGA, Dual Gigabit Ethernet, Audio and USB
<b>Optional</b>	<b>PA-M1AU</b> Multimedia kit with audio and USB ports <b>PS/2 Keyboard/Mouse Cable with Bracket</b> PS/2 keyboard/mouse connectors on bracket <b>Low Profile LGA775 Cooler</b> High efficiency slim cooler that increases reliability of system

## GENERAL

Processor	CPU & Package: Intel® Core™ 2 Duo, Pentium® D, Pentium® 4, Celeron® D processor in the LGA-775 package FSB: 1066/800/533MHz
Chipset/Core Logic	Intel® Q965 and ICH8
System Memory	Up to 4GB DDR2 800/667/533 SDRAM on dual 240-pin DIMM socket
BIOS	Award BIOS
Storage Devices	EIDE: N/A SATA: Support four SATA 300 drives
Solid State Disk	N/A
Watchdog Timer	Programmable via software from 0.5 sec. to 254.5 min.
Expansion Interface	N/A
Hardware Monitoring	System monitor (fan, temperature, voltage)
Power Requirement	Typical: +5V@5.6A; +12V@1.3A
Dimension	Dimension : 338.5(L) x 122(W) mm; 13.33"(L) x 4.8" (W) PCB: 6-layer
Environment	Operating Temperature: 0 to 60°C Storage Temperature: -20 to 80°C Relative Humidity: 5% to 90%, non-condensing
MTBF	TBA

## I/O

MIO	Two serial (RS-232x1, selectable RS232/422/485x1), one parallel and one FDD channel
IrDA	N/A
Ethernet	- Dual 10BASE-T/100BASE-TX/1000BASE-T Ethernet - PCI Express x1 interface based Gigabit Ethernet - Dual RJ-45 connectors with two LED indicators
Audio	HDA interface, 2-channel Audio
USB	Six USB 2.0 ports
Keyboard & Mouse	Two USB 2.0 ports on bracket dedicated to keyboard & mouse

## DISPLAY

Graphic Controller	- GMCH integrated Intel Graphics Media Accelerator 3000 (Intel® GMA 3000) - Provides improved 3D multimedia capabilities including DirectX 9, Shader Model 3.0, OpenGL 1.5, Advanced De-interlacing, MPEG-2 hardware acceleration
Graphic Memory	Intel® Dynamic Video Memory Technology (DVMT) 4.0 system memory sharing up to 256MB
Display Interface	Support CRT interface up to QXGA 75Hz (2048 x 1536)