


# IBOX-650 *Embedded Fan-less Box Server with Intel® ULV Celeron® 650MHz*



## Main Features

- Highly Robust, fanless design maintains reliable operation over long period of time
- VESA compliant mounted bracket
- Simple structure saves maintenance expenses
- RoHS Compliant

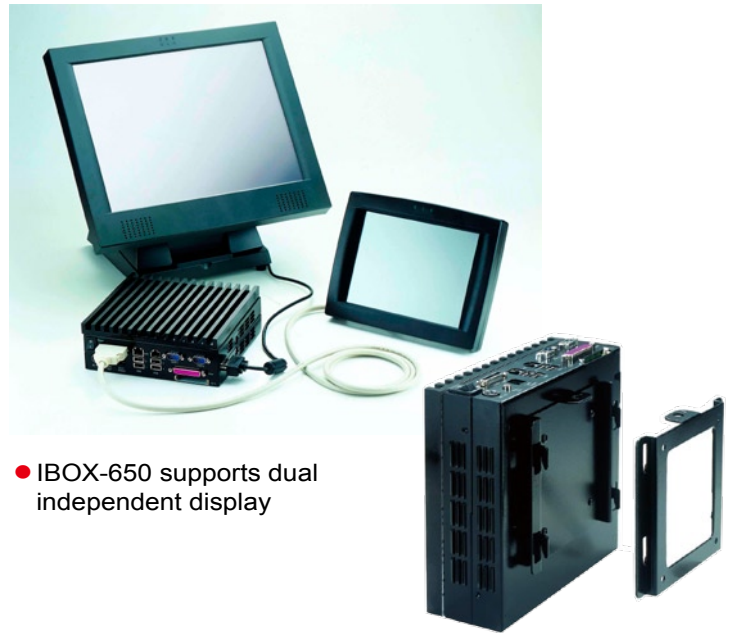


- IBOX-650 supports dual independent display

- Supports Wallmount via VESA standard

## Specifications

<b>Processor</b>	Intel® ultra low voltage Celeron® 650MHz processor with 256KB L2 cache
<b>System Chipset</b>	CLE 266 + VT8235
<b>System Memory</b>	Supports one DDR 266/333, 184-pin DIMM sockets, support up to 1GB memory
<b>Display</b>	Supports dual independent display 1 x VGA with DB-15 connector 1 x SCSI connector for LVDS and RS-232 for touch screen application (IVIEW-0840-LVDS; IVIEW-1210-LVDS)
<b>Ethernet</b>	10/100BASE-T Realtek 8100BL Fast Ethernet connector
<b>SSD</b>	Compact Flash Type I/ II
<b>IDE Port</b>	One IDE 40 pin 2.54 pitch connector
<b>I/O Ports</b>	3 x RS-232 ( 2 x RS232 DB-9, 1x RJ-45, w/ DC +5V or +12V selection ) 1 x Parallel port, supports ECP/EPP/SPP 5 x USB 2.0 ports 2 x PS/2 connectors for keyboard and mouse 1 x RJ-11 for D I/O function
<b>Audio Jack</b>	AC'97 2.0 Compliant, Line-out
<b>Power Supply</b>	AC Power Adaptor 12VDC@ 6.5A
<b>Gross Weight</b>	3.5 Kg
<b>Dimensions (mm)</b>	190(W) x 180(L) x 68(H) mm
<b>Operation Temp.</b>	0°C to 50°C

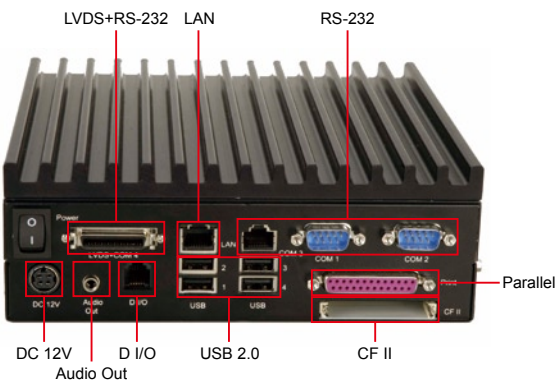

## IBOX-650 Packing List

- 1 x IBOX-650-RS
- 1 x Installation CD
- 1 x Power cord
- 1 x Wall Mount Kit
- 1 x Power Adaptor

## Ordering Information

- **IBOX-650-RS**  
Embedded Fan-less Box Server with Intel ULV Celeron 650MHz, RoHS