

FEATURES

- Passive cooling design
- Low cost possible.
- High efficiency Power supply

Ordering Guide

Chassis Name	KM 190+ Plug in P/S
Vesa Mounting Kits	VM 75100


General

Construction	Heavy duty steel, SGCC
Color	Black
Driver Bay	Internal: 1 x 2.5"
LED Indicators	Power, HDD
Switch	Power on/off x 1
Cooling	Passive cooling
Mainboard	Mini ITX 170 x 170 mm mainboard
Power (option)	Efficiency > 90% , 60W output; Plug in ATX P/S
Mounting	<ul style="list-style-type: none"> ● Desktop, wall mount (standard; WMK190) ● Vesa mount (option; VM75100)
Weight	Net 1 kgs, Gross 1.38 kgs
Dimension	W 200 x D 190 x H 62 mm
Carton & packing	5 inner boxes in one outside carton, 5 ply export carton (W500 x D300 x H280mm, 1.49 CBF), PE Foam system packing

Environment

Operating Temp. Range	0 °C ~ 50 °C (32 °F ~ 122 °F)
Storage Temp. Range	-20 °C ~ 80 °C (-4 °F ~ 176 °F)
Relative Humidity	5 % ~ 95 % , non-condensing
Vibration	5 ~ 7 Hz : 0.5 "double amplitude displacement 7 ~ 2000 Hz : 1.5 g acceleration

Mechanical Drawing

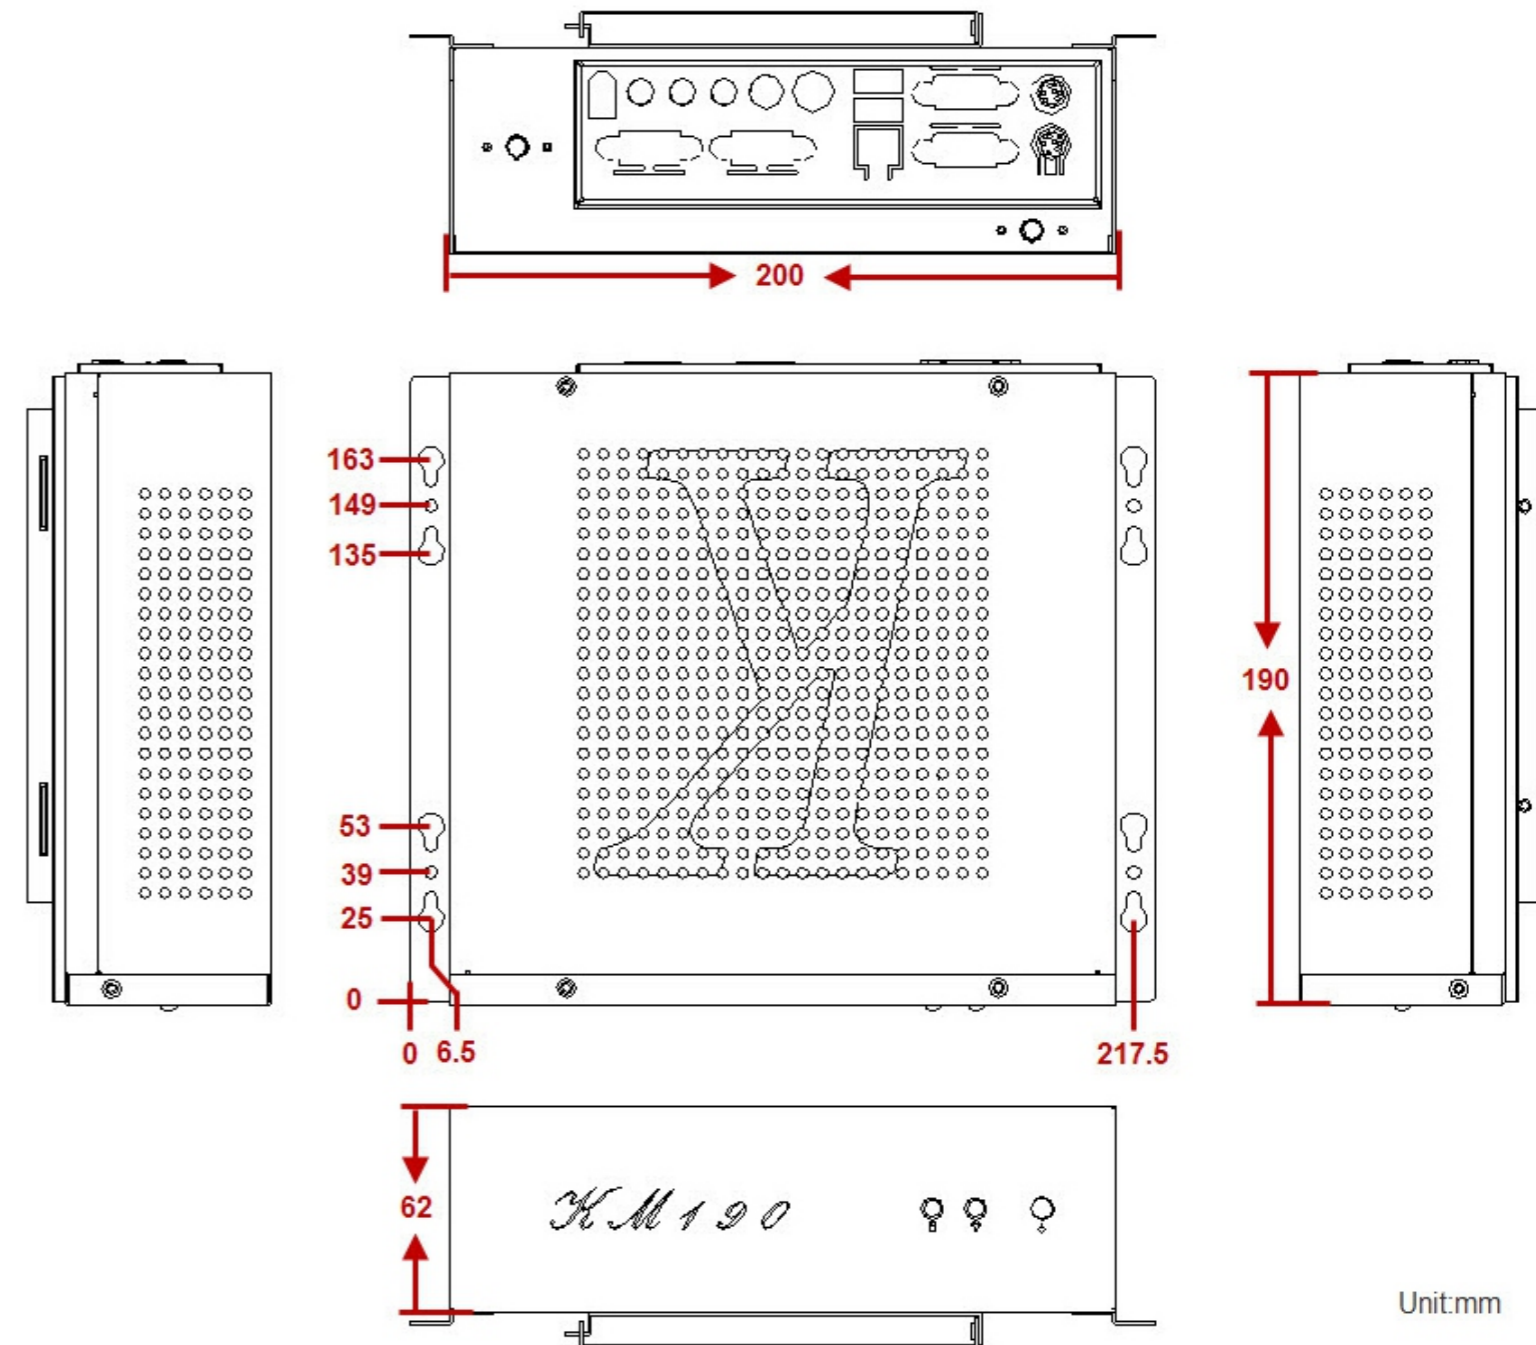

Unit:mm