




KM202

Mini ITX Chassis



KM202

Mini ITX Chassis

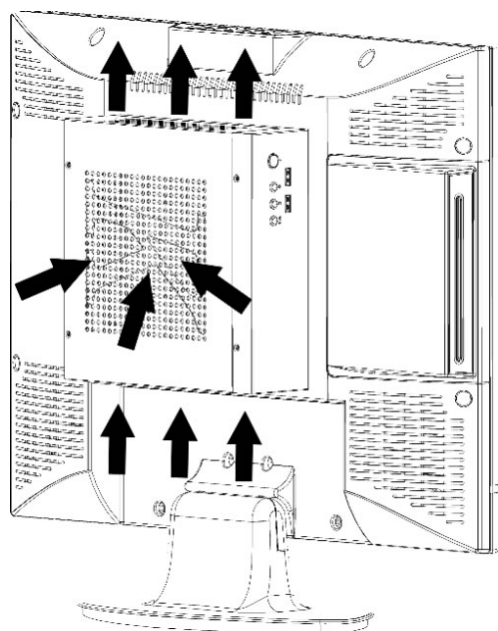

Enviroment


Operating Temp . Range	0 °C ~ 50 °C (32 " H 122 " H)
Storage Temp . Range	-20 °C ~ 80 °C (-4 " H 176 " H)
Relative Humidity	5 % ~ 95 % , non-condensing
Vibration	5 ~ 7 Hz : 0.5 " double amplitude displacement 7 ~ 2000 Hz : 1.5 g acceleration

Recommend Installation

FEATURES

- Passive cooling design
- Low cost fanless system possible
- Plug in P/S

Mechanical Drawing

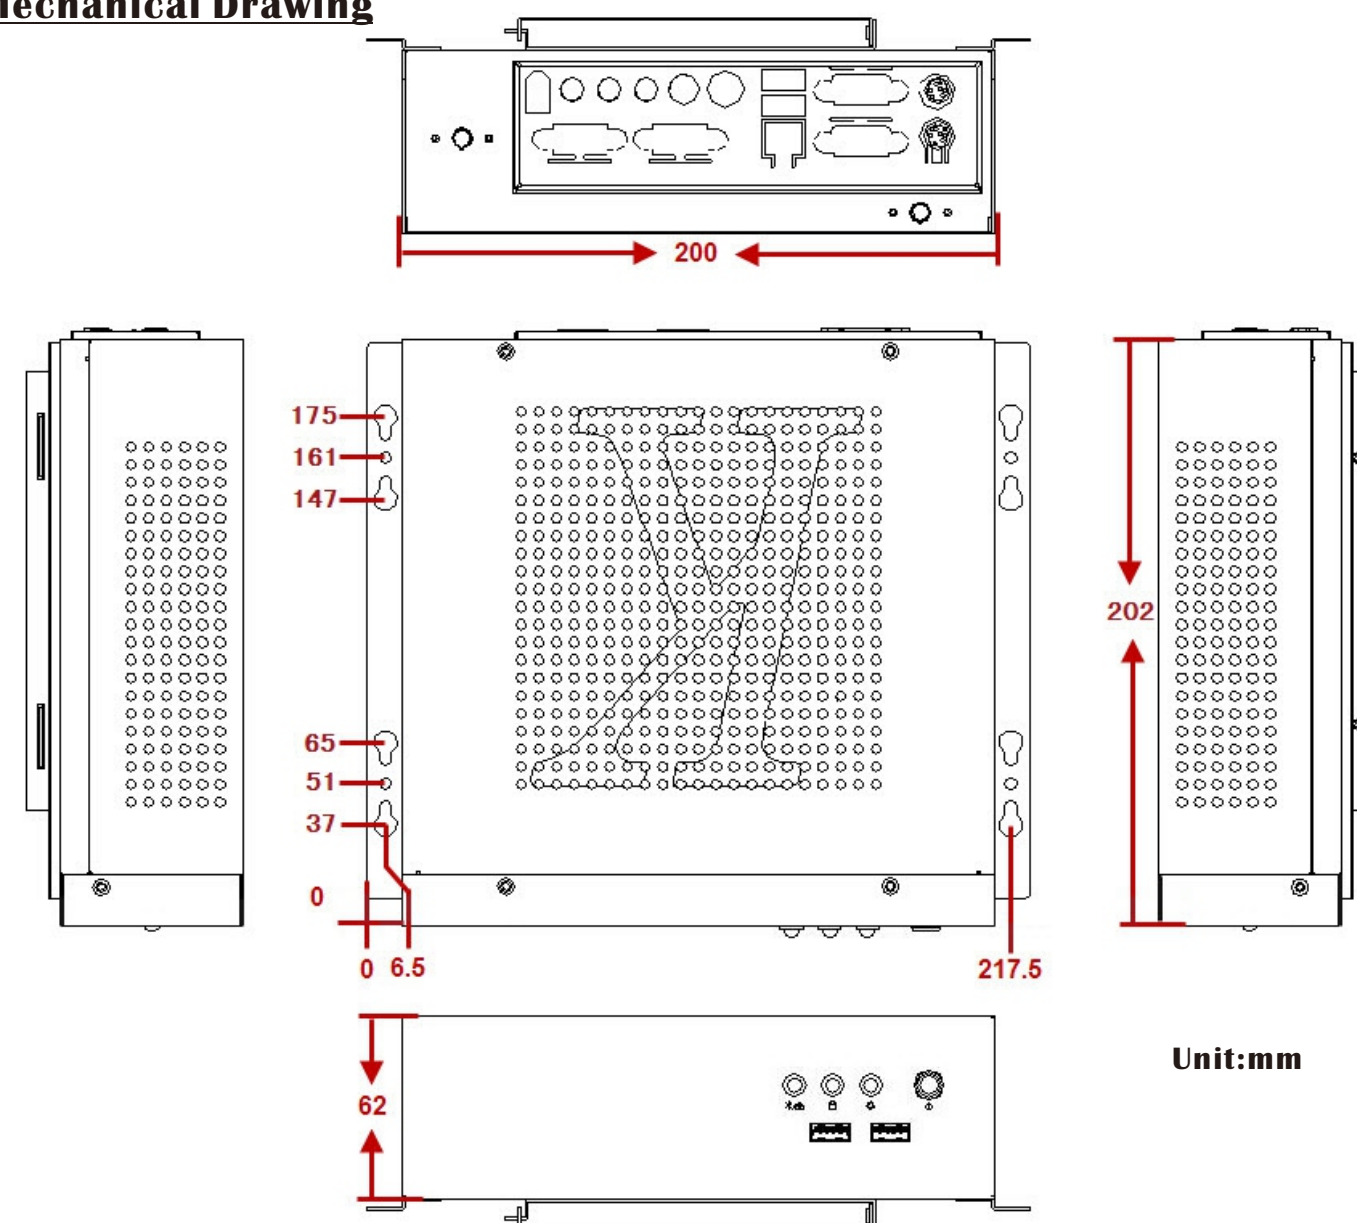

Unit:mm

General

Construction	Heavy duty steel, SGCC
Color	Black
Driver Bay & I/O	Internal: 1 x 2.5" HDD, 2 x USB 2.0
LED Indicators	Power, HDD , LAN / Bluetooth
Switch	Power on / off x 1
cooling	Passive cooling
Mainboard	Mini ITX 170 x 170 mm mainboard
Power (option)	● Efficiency > 90% , 60W output, Plug in P/S
Mounting	● Desktop, wall mount (standard, WMK202) ● Vesa mount (option: VM75100) ● Anti-vibration Mounting Kit (AVK202, option)
Weight	Net 1.05 kgs, Gross 1.43 kgs
Dimension	W 200 x D 202 x H 62 mm
Carton & packing	5 inner boxes in one outside carton, 5 ply export carton (W500 x D300 x H280mm, 1.49 CBF), PE Foam system packing