

### FEATURES

- Passive cooling design
- Low cost possible.
- High efficiency Power supply

### Ordering Guide

Chassis Name	KM 261+plug in P/S
Vesa Mounting Kits	VM 75100


### General

<b>Construction</b>	Heavy duty steel, SGCC
<b>Color</b>	Black
<b>Driver Bays</b>	Internal: 1 x slim DVD + 2 x 2.5" HDD
<b>LED Indicators</b>	Power, HDD
<b>Switch</b>	Power on/off x 1
<b>Cooling</b>	Passive cooling
<b>Mainboard</b>	Mini ITX 170 x 170 mm mainboard
<b>Power(option)</b>	Efficiency > 90% , 60W output; plug in ATX P/S
<b>Mounting</b>	<ul style="list-style-type: none"> <li>● Desktop, wall mount ( Standard, WMK261 )</li> <li>● Vesa mount (option; VM75100 )</li> </ul>
<b>Weight</b>	Net 1.3 kgs, Gross 1.72 kgs
<b>Dimension</b>	W192 x D 261 x H 62 mm
<b>Carton &amp; packing</b>	5 inner boxes in one outside carton, 5 ply export carton ( W500 x D330 x H310 mm, 1.81 CBF ), PE Foam system packing

### Environment

Operating Temp . Range	0 °C ~ 50 °C ( 32 " H 122 " H )
Storage Temp . Range	-20 °C ~ 80 °C ( -4 " H 176 " H )
Relative Humidity	5 % ~ 95 % , non-condensing
Vibration	5 ~ 7 Hz : 0.5 " double amplitude displacement 7 ~ 2000 Hz : 1.5 g acceleration

### Mechanical Drawing

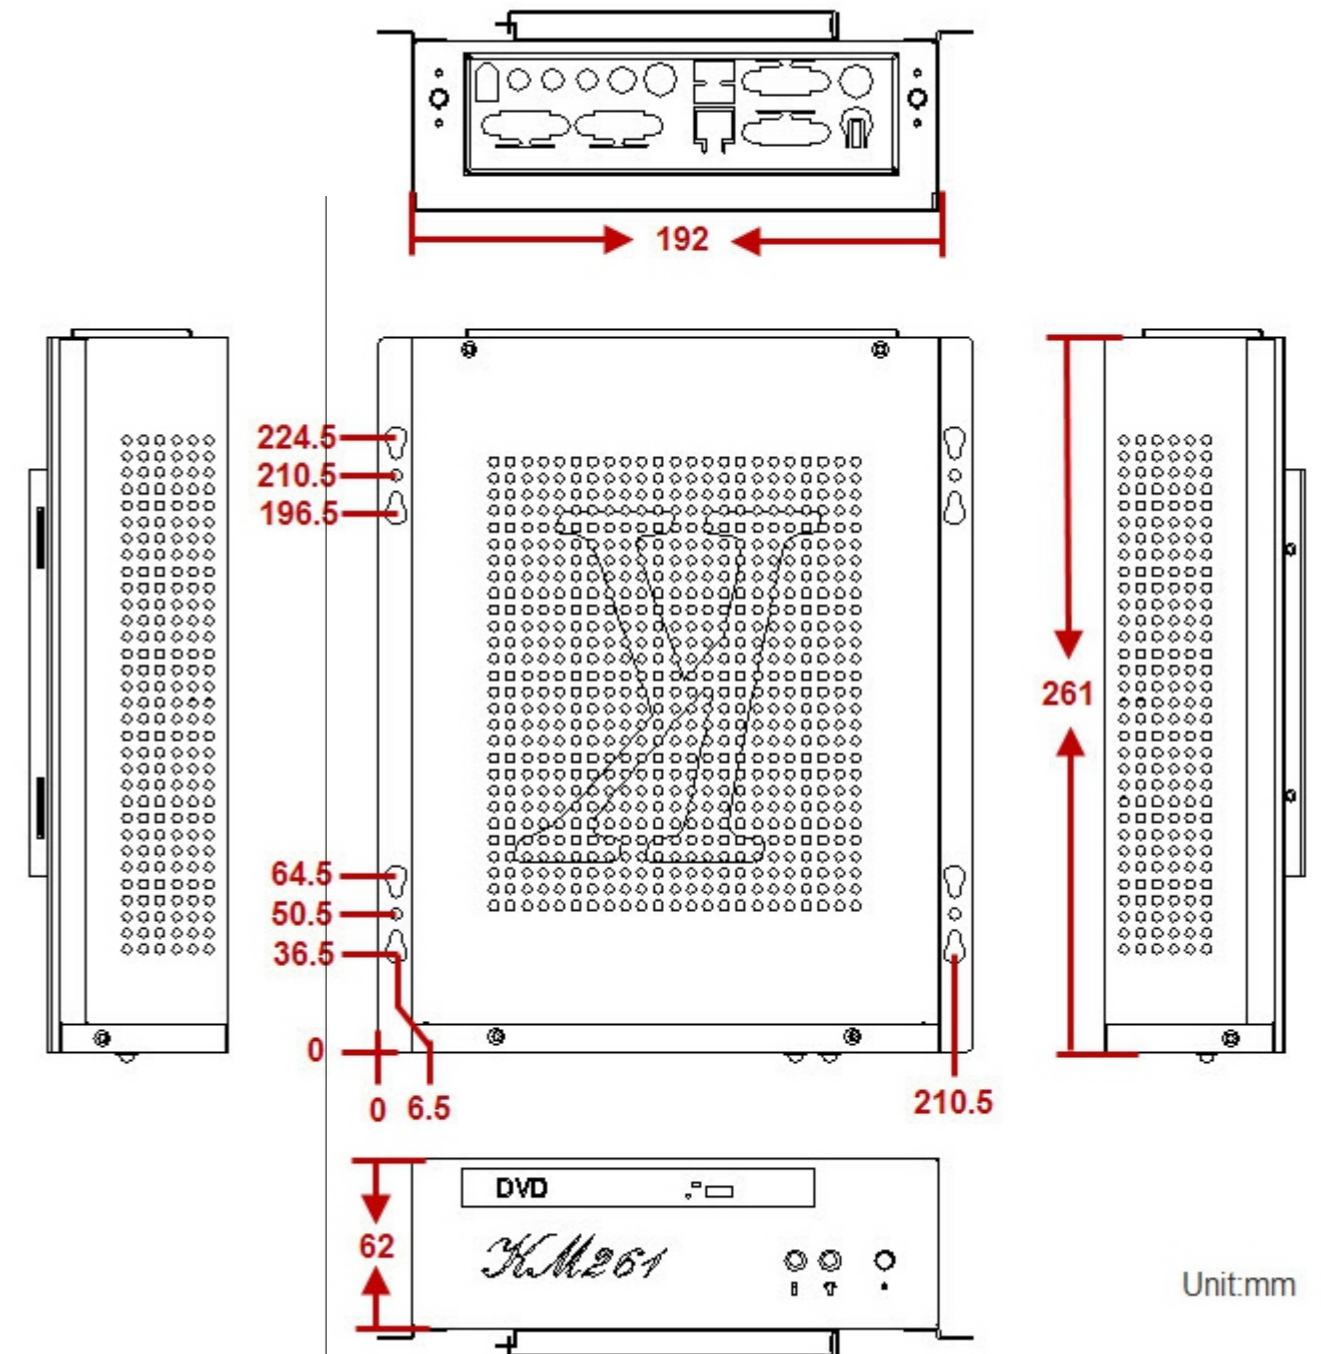

Unit:mm