


## 15" Fanless Panel PC

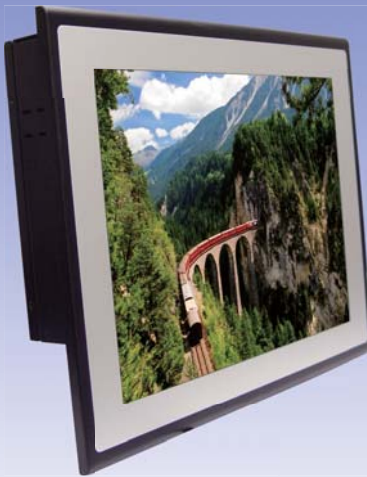

Touch Screen

**Feature :**

Intel Core 2 Duo, Atom / VIA solution, Fanless, Touch screen, Water Proof, LED Backlight Panel, Open-frame design

**Application:**

Information Kiosk, POS, Mobile solution, Automation control

**Panel PC Information**

LCD Panel	AUO
Resolution	XGA 1024 x 768
Brightness ( cd/m2 )	400
Contrast Ratio	700 : 1
Backlight	LED / CCFL
Number of Colors	262144
Touch Screen	AMT 8 wires / Resistive touch screen
Mounting Spec.	VESA 75/100 / Panel Mount
Panel frame water proof	IP65
Webcam ( Option )	5.0 Mega pixel - auto focus
Accessory ( Option )	Wall Mount Kit / Stand

**Fanless Panel PC :**

. Panel PC Dimension	75.5 H x 384 W x 312 D mm ( For Lex STD M/B ) 66 H x 384 W x 312 D mm ( For 3.5" M/B )
. Case Dimension	65.5 H x 354.2 W x 282.6 D mm ( For Lex STD M/B ) 56 H x 354.2 W x 282.5 D mm ( For 3.5" M/B )
. Front Panel Dimension	10 H x 384 W x 312 D mm
. Material	Plastics front frame + Aluminum
. Weight	5 Kg ( Incl. M/B )
. Storage Space	2.5" / 3.5" HDD
. Operation Humidity	5 ~ 90% @ 39 °C, non-condensing

M/B information: ( Please refer to M/B specification )



CPU Type	M/B Model	VGA	COM	LAN	USB	Audio	KB/MS	Others	Operation Temp.	
									CF Card	HDD
Intel Atom D525	3I525CW	1	6	2	4	YES	-	-	55°C	50°C
	BI525CW	1	6	2	2	YES	-	Rechargeable Battery	-	-
Intel Atom N270	3I270C	-	6	1	2	YES	-	-	50°C	50°C
	CI270CW	1	6	2	4	YES	YES	DVI	55°C	45°C
	MI270AW	1	2	2	4	YES	YES	DVI / TV-Out / Video-In	55°C	45°C
Intel Core 2 Duo Socket M	CI945C	1	6	2	4	YES	YES	DVI	50°C	50°C
	MI945A	1	2	2	4	YES	YES	DVI / TV-Out / Video-In	50°C	50°C
VIA Eden / ULV or C7	3V700C	1	4	1	2	YES	-	-	50°C	45°C

More Functions				
Aluminum / Stainless Case	Capacitive touch	Webcam	Parallel Port	
DC +6V to +36V	High Brightness Panel	1 ~ 4 Video-IN	Bluetooth	Optional LAN
Rechargeable Battery	DIO	Speaker	Wi-Fi	GPS
3G	4 x COM	H.264 decode	USB	

The above available functions outline the possibility with system, for more information please contact us.

