


Wall mount Drawing

Specification

Model	K110023
System	Compact Mini ITX System, 4th Gen iCore Haswell platform Long Term Support, with flexible I/O Panel
Chassis	KM261 Stylish Black with slim DVD, PWR / HDD Led 2 x 2.5" HDD
Mainboard	Kino-DH810-R10, Industrial Grade, H81 Chipset
CPU	i5-4570T 2Core/4Thread 2,8-3,6Ghz, HD4600 GFX 200Mhz, 4MB AMT9.0
Memory	4GB (2x2) DDR3L SODIMM 1600Mhz on 2* DIMM (16GB max)
Display	Intel® HD Graphics Gen 7.5 supports DX11.1 and OpenCL 1.2, OpenGL 3.2 DVI-D (up to 2560x1600 @ 60 Hz) VGA (up to 1920x1200 @ 60 Hz)
Ethernet	Dual LAN: Intel® I211-AT PCIe controller
Audio	Realtek ALC662 HD audio codec
Super I/O	Fintek F81866
Rear I/O	2* RS232 DB9, VGA, DVI-D, 2* RJ45 GbE, 2* USB 2.0, 2* USB 3.0, Line IN/OUT
on Board	TPM, SMBUS (4pin), Digital I/O (2*5pin), PS/2, USB 2.0 (2,0mm), 1* Mini PClex1 w/ mSATA
Watch Dog	Software programmable, support 1~255 sec. system reset
Power	4pin 12VDC via 84Watt AC/DC Adapter 90-230V AC
Dimension	W192 x D 261 x H 62 mm (Chassis)
Weight	2,05KG without Power Adapter / Mounting Kits

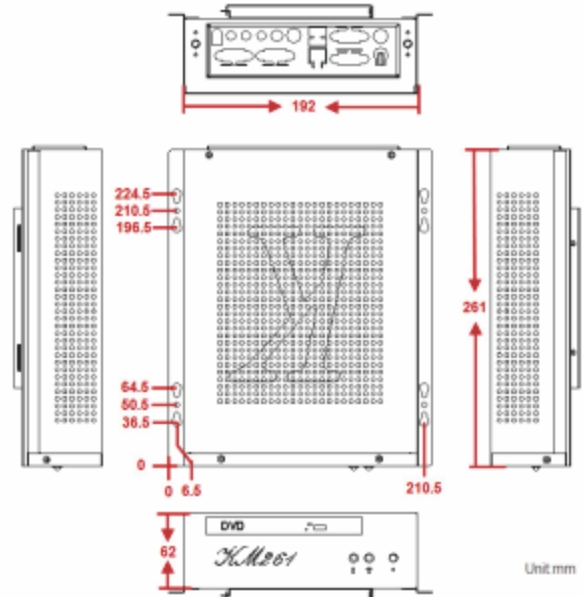

Packing List	1* K110023 ITX System, i5-4570T, 2x2GB RAM, 500GB SATA HDD AD84M4PP24 12V pin Power Adapter 90-230V AC, EU Power Cord Driver / Utility DVD, ONEKEY Recovery DVD Wal Mount kit
---------------------	--

Optional CPU	i7-4770T 4C/8T 2,5-3,7Ghz, HD4600 GFX 350Mhz, 8MB AMT9.0 i3-4350T 2C/4T 3,1Ghz, HD4600 Gfx 200Mhz, 4MB
Optional Parts	AVK261, anti-vibration w all mount kits VM75100, Vesa Mount Kit F2X410 2* 40mm FAN TPM-IN01-R11: 20-pin Infineon TPM module, softw are management tool, firmw are V3.17 mSATA SDD (Colay w ith mPCIe port) Bluetooth, W-LAN, WIFI, 3G, 4G Modem, SIM, GPS via mPCIe Slot, DP-VGA-R10