


TPC6000-C1564-B-LHP-P

Fanless

■ Features:

- 15.6" TFT 1920 x 1080
- 3 x LANs
- Capacitive touch screen
- Support Intel® Core™ 10th-11th gen i3/i5 high performance processors
- DC12~24V $\pm 10\%$
- Panel Mounted & VESA Mounted

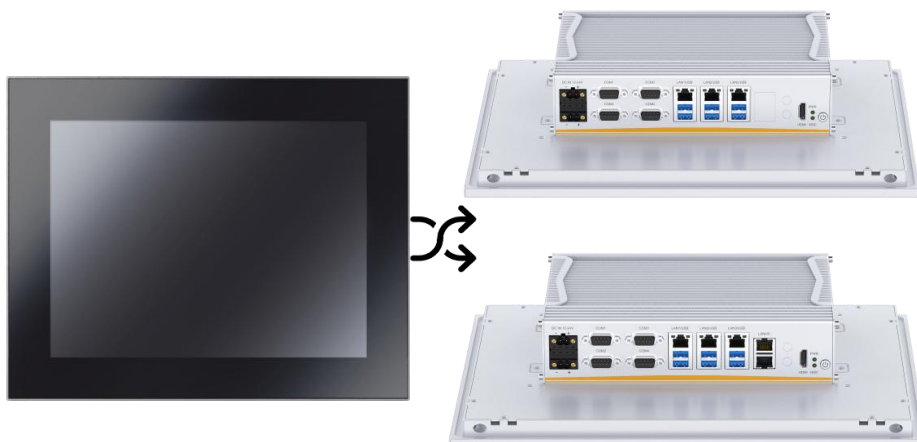


■ Specifications:



Product Name		TPC6000-C1564-B-LHP-P
System	CPU	Intel® Core™ 10-11代i5/i3 CPU type LGA1200 . Max.35W
	Chipset	H510
	Memory	Support 2 x DDR4-2666/3200 MHz, Up to 32GB
	Storage	1 x M.2(M Key 2280 PCIe Gen3 x 4 Lane) 1 x mSATA
I/O	Network	3 x Intel 1000Mbps RJ-45
	USB	4 x USB3.0 + 2 x USB2.0
	Serial port	4 x RS-232 / RS-485 ,RS485 support automatic flow control
	I/O port	8DI Wet contact input (24V) 8DO PNP Output (24V 500mA)
	HDMI	1920x1080 60Hz
	Expansion slot	1 x Mini-PCIe slot, Support Wifi,4G modules
Mechanical	Weight	4.7kg
	Installation	Panel Mounted & VESA Mounted
	Dimensions (W x H x D)	405mm * 258mm * 74mm
	Cut out size (W x H)	387mm * 240mm
OS	OS	Windows 10, Windows 11, Windows IoT, Linux, Unbuntu
Power Consumption	Input Voltage	DC12~24V $\pm 10\%$, support reverse polarity protection, overvoltage protection, overcurrent protection
	Idle Power Consumption	28W
LCD	LCD Size	15.6" TFT
	Resolution	1920 x 1080
	MTBF (hours)	15000hrs
	Luminance	250cd/m2
	Contrast Ratio	3000: 1
	Viewing Angle	(L) 89° / (R) 89° / (T) 89° / (B) 89°
Touch Screen	Touch Screen Type	Capacitive touch screen
	Transmittance	> 87%
	Controller Interface	USB
Environment	Operating Temperature	-0 ~ 50°
	Storage Temperature	-20 ~ 60°
	Relative Humidity	5~95% (40°Non-condensing)
	Vibration	SSD applied: 1.5 Grms, IEC 60068-2-64, random, 5 ~ 500 Hz, 1 hr/axis
	Shock	Operating 10G peak acceleration (11ms duration), follow IEC 60068-2-27
	EMC	CE/FCC Class B
	Waterproof	Front IP65 compliant

■ **Dimensions & Interfaces** Unit:mm

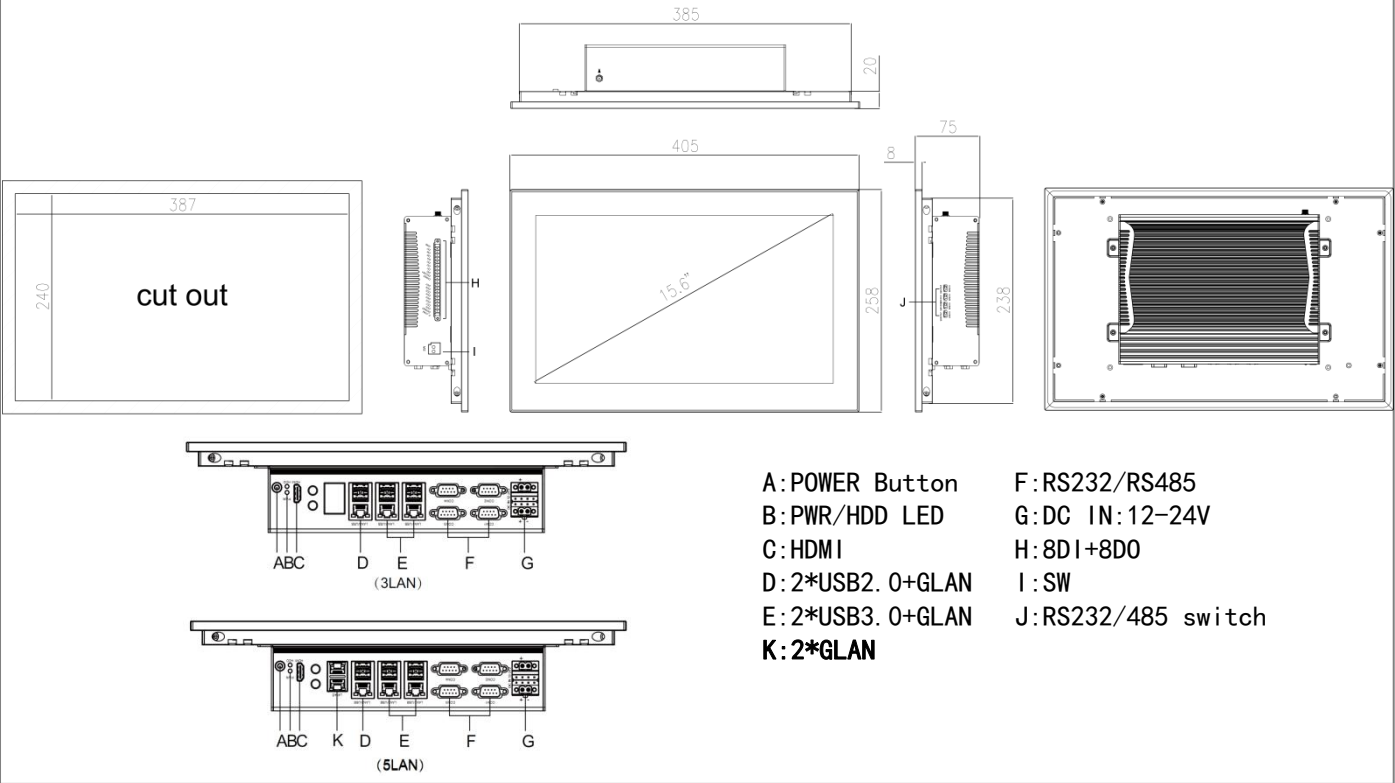

■ **Ordering Information**

TPC6000-C	Description
TPC6000-C1564-B-LHP-P	15.6 "LCD,1920*1080, 4 x COM(RS232/485 Selectable), 3 x GLAN, 6 x USB, 8DIO, DC12~24V Input

■ **Optional Parts**

Replacement	Description
CPU	Support 10th/11th generation Intel® Core™ i3/i5 LGA 1200 socket type processors Intel® Core™i5-11400T,Six Cores,1.30 GHz,12 MB Cache; Intel® Core™i5-11500T,Six Cores,1.50 GHz,12 MB Cache; Intel® Core™i5-10400T,Six Cores,2.00 GHz,12 MB Cache; Intel® Core™i5-10500T,Six Cores,2.30 GHz,12 MB Cache; Please contact sales to check other request.
Memory	DDR4 4G/8G/16G
Storage	Mini SATA SSD 64G/128G/256G/512G/1TB
Storage	M.2 SSD 128GB,256GB,512GB,1TB,2TB
WIFI	miniPCIE WIFI Kit(7260 Series), Cylindrical Antenna
Expansion slot	mini PCIE,EC20.EG25.EC25